


### Canal & Mini Canal 2 and 4 Channel

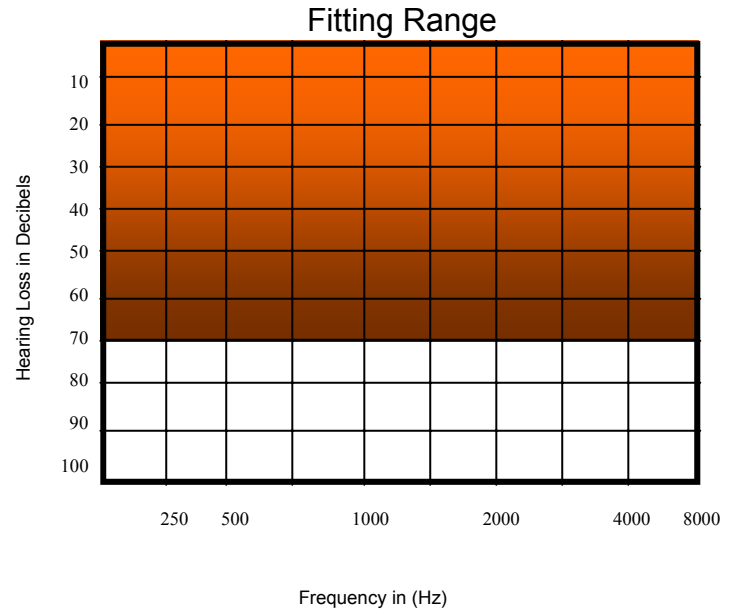

PERFORMANCE DATA			
OSPL90 Maximum (dB SPL)		90dB-125dB + 3dB	
HF Average OSPL90 (dB SPL)		109dB +/- 4dB	
HF Average Full On Gain (dB)		Up to 50dB +/-5 dB	
Reference Test Gain (dB)		Varies with gain requirement	
Frequency Range: f1 - f2 (Hz)*		200 - 5500 Hz	
Total Harmonic Distortion Typical/Maximum	@ 500 Hz	1%	4% maximum
	@ 800 Hz	1%	4% maximum
	@1600 Hz	1%	4% maximum
Equivalent Input Noise Level (dB SPL)		35dB maximum	
Battery current Drain, Maximum ( m A)		09mA	
Typical Battery Life - 13 Zinc Air (hrs) **		288 hrs.	

### FEATURES

- 2 or 4 Channel Digital Circuit
- Up to 4 Memories
- 2 and 4 Channel circuits Adaptive Feedback Cancellation
- 4 Channel only Active Noise Reduction
- User VC capable
- Programmable with Fisher Fit Software
- 1 year Limited Warranty
- Mild to Moderate Severe Hearing Loss
- Colors, Pink, Tan, Carmel, Dark Brown
- Several Programmer connection options
- 1 year loss and damage

Specifications of Electroacoustical Characteristics according to Ansi S3.22-2003

\* Currently no standards for frequency response beyond 5000Hz

\*\* Battery life will vary due to volume control setting, battery type and manufacturer Unit is 100% programmable Specs are for reference only

**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**