


Dulcet 312 2 and 4 channel

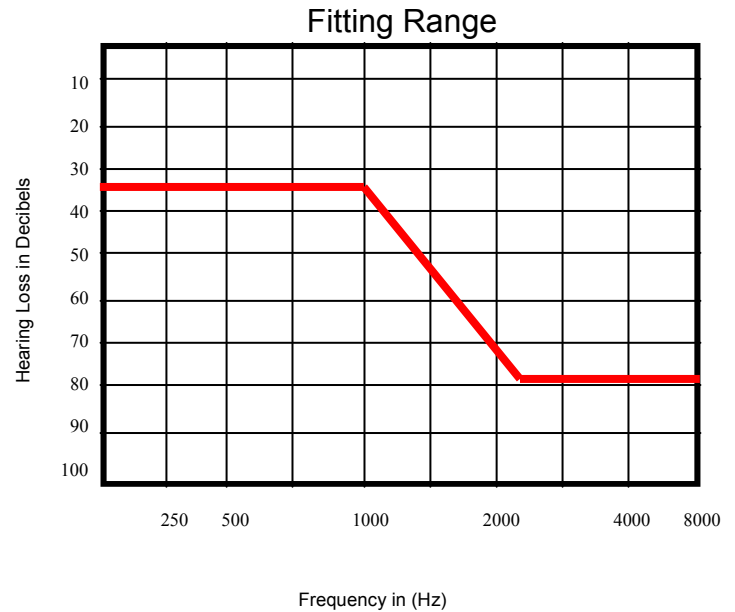

PERFORMANCE DATA

OSPL90 Maximum (dB SPL)	90dB-125dB + 3dB		
HF Average OSPL90 (dB SPL)	109dB- 120dB +/- 4dB		
HF Average Full On Gain (dB)	Up to 45dB +/-5 dB		
Reference Test Gain (dB)	Varies with gain requirement		
Frequency Range: f1 - f2 (Hz)*	200 - 5500 Hz		
Total Harmonic Distortion	@ 500 Hz	1%	4% maximum
	@ 800 Hz	1%	4% maximum
Typical/Maximum	@1600 Hz	1%	4% maximum
Equivalent Input Noise Level (dB SPL)	35dB maximum		
Battery current Drain, Maximum (mA)	09mA		
Typical Battery Life - 10A Zinc Air (hrs)	90 hrs.		
**			

Specifications of Electroacoustical Characteristics according to Ansi S3.22-2003

* Currently no standards for frequency response beyond 5000Hz

** Battery life will vary due to volume control setting, battery type and manufacturer
Unit is 100% programmable Specs are for reference only

FEATURES

- 2 or 4 Channel Digital Circuit
- Up to 4 Memories
- 2 and 4 Channel circuits Adaptive Feedback Cancellation
- 4 Channel only Active Noise Reduction
- Programmable with Fisher Fit Software
- Thin tube design for high frequency hearing loss
- Can be fit with custom earmold
- 4 tube lengths
- 3 dome sizes
- 1 year Limited Warranty
- 1 year loss and damage

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE